

# CONFIDENT

— By Actiu —



■ **DESCRIPTION**

**Back and Seat** with a Beech plywood lacquered sheets placed in perpendicular or transversal position, with PU (polyurethane) flexible molded foam density of 40kg/m<sup>3</sup>, radiance thickness of 30mm thick seat. Upholstered finish with simple cleaning and maintenance.

**4 legs Structure with Ø 20 mm steel tube and 2 mm thick.** Electrostatic coat; thickness 90µm. Black, silver and chrome finishes; Black Polypropylene (P.P) Caps.

**Armsrests:** Black Polypropylene (P.P)



■ **BACK AND SEAT**

GROUP T-C



GROUP N



GROUP M - MELANGE




(see finishes and fabric card)

- ① Back and Seat with a Beech plywood lacquered sheets
- ② Model with arms. (Armsrests: Black Polypropylene (P.P) )
- ③ 4 legs Structure with laminated steel tube Ø 20 x 2 mm thickness
- ④ Black Polypropylene (P.P) Caps

■ **SIZES**

Total height: de 890 mm  
 Total width: de 550 mm  
 Total depth: de 540 mm

■ **SIZES**

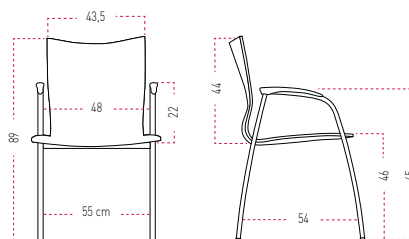

Confident 130 - 4 Legs

■ **DESCRIPTION**

**Back and Seat** with a Beech plywood lacquered sheets placed in perpendicular or transversal position, with PU (polyurethane) flexible molded foam density of 40kg/m<sup>3</sup>, radiance thickness of 30mm thick seat. Upholstered finish with simple cleaning and maintenance.

**Cantilever Structure** with Ø 20 mm steel tube and 2 mm thick. Electrostatic coat; thickness 90µm. Black, silver and chrome finishes; Black Polypropylene (P.P) Caps.

**Armsrests:** Black Polypropylene (P.P)



■ **BACK AND SEAT**

GROUP T-C



GROUP N



GROUP M - MELANGE




(see finishes and fabric card)

- ① Back and Seat with a Beech plywood lacquered sheets
- ② **Model with arms.** (Armsrests: Black Polypropylene (P.P) )
- ③ Cantilever Structure with laminated steel tube Ø 20 x 2 mm thickness
- ④ Black Polypropylene (P.P) Caps

■ **SIZES**

Total height: de 890 mm  
 Total width: de 570 mm  
 Total depth: de 540 mm

■ **SIZES**

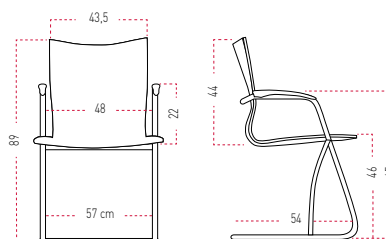

Confident 120 - Cantilever

■ **DESCRIPTION**

**Back and Seat** with a Beech plywood lacquered sheets placed in perpendicular or transversal position, with PU (polyurethane) flexible molded foam density of 40kg/m<sup>3</sup>, radiance thickness of 30mm thick seat. Upholstered finish with simple cleaning and maintenance.


**4 legs Structure** with laminated steel tube Ø 25 x 2 mm thickness. Electrostatic coat; thickness 90µm. Black, silver and chrome finishes; Black Polypropylene (P.P) Caps.

**Armsrests:** Black Polypropylene (P.P)  
Posibility for 4 Stackable Chairs



■ **BACK & SEAT**


GROUP T-C



GROUP N




GROUP M - MELANGE




(see finishes and fabric card)

■ **SEAT AND BACK THICKNESS**



■ **SIZES**

Confident 230 - 4 Legs

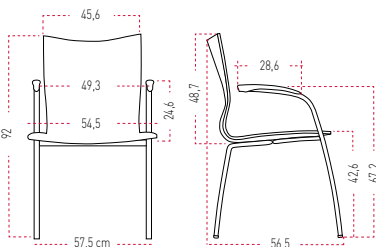

- ① Back and Seat with a Beech plywood lacquered sheets
- ② Models with arms. (Armsrests: Black Polypropylene (P.P) )
- ③ 4 legs Structure with laminated steel tube Ø 25 x 2 mm thickness
- ④ Black Polypropylene (P.P) Caps

To request the Confident 230 - 4 legs model with **stackable system**, for projects, please consult with Sales Department.

■ **SIZES**

Total Height: 920 mm  
Total Width: 575 mm  
Total Depth: 565 mm  
  
Seat Height: 487 mm  
Seat Width: 545 mm  
Seat Depth: 565 mm

■ **DESCRIPTION**

**Back and Seat** with a Beech plywood lacquered sheets placed in perpendicular or transversal position, with PU (polyurethane) flexible molded foam density of 40kg/m<sup>3</sup>, radiance thickness of 30mm thick seat. Upholstered finish with simple cleaning and maintenance.


**Cantilever Structure with** laminated steel tube Ø 25 x 2 mm thickness. Electrostatic coat; thickness 90µm. Black, silver and chrome finishes; Black Polypropylene (P.P) Caps.

**Armsrests:** Black Polypropylene (P.P)



■ **BACK & SEAT**


GROUP T-C



GROUP N




GROUP M - MELANGE

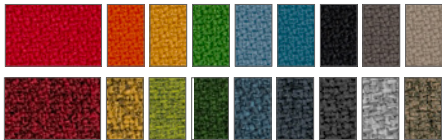

[see finishes and fabric card]


- ① Back and Seat with a Beech plywood lacquered sheets
- ② **Models with arms.** (Armsrests: Black Polypropylene (P.P) )
- ③ Cantilever Structure with laminated steel tube Ø 25 x 2 mm thickness
- ④ Black Polypropylene (P.P) Caps

■ **SEAT AND BACK THICKNESS**



■ **SIZES**

Confident 220 - Cantilever

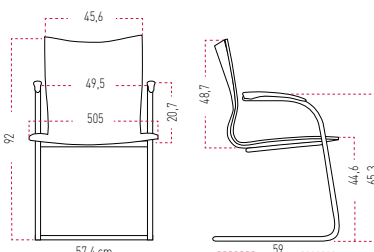

■ **SIZES**

Total Height: 920 mm  
Total Width: 574 mm  
Total Depth: 590 mm

Seat Height: 487 mm  
Seat Width: 505 mm  
Seat Depth: 565 mm

To request the Confident 220 - Cantilever model with **stackable system**, for projects, please consult with Sales Department.



**MATERIALS**

Maximum use of materials to eliminate and minimize scraps. Use of recyclable and recycled materials in those components that do not affect the functionality and durability.

**22,99%**  
RECYCLED  
MATERIALS



**PRODUCTION**

Maximum optimization of energy use. Minimal environmental impact. Last generation technological systems. Zero discharge of wastewater. No VOC coatings. Processes free of heavy metals, phosphates, OC and COD.

**100%**  
RECYCLABLE  
ALUMINIUM, STEEL  
& WOOD



**TRANSPORT**

Detachable systems. Volumes that facilitate the optimization of space. Maximum reduction of energy consumption by transport.

**100%**  
RECYCLABLE  
PACKAGE AND THINNER  
FREE



**USE**

Quality and warranty. Long lasting. Replacements available.

**EASY**  
TO CLEAN  
AND MAINTAIN



**DISPOSAL**

Waste reduction. Supplier-manufacturer packaging reuse system. Components are easy to be separated. Inks in packaging are water-based, without solvents.

**94,28%**  
RECYCLABLE  
MATERIALS

■ **CERTIFICATES AND REFERENCES**

The different programmes get points in different environmental categories to get the LEED certificate (sustainability, material and resources, water, energy and atmosphere, inner environment quality, innovation and design).



■ **STANDARDS**

**CONFIDENT** has passed tests done in our technical department as well as the tests done in **AIDIMA** the Technological Institute for furniture. The tests correspond to:

**CONFIDENT 130.**

- **UNE-EN 13761:04.** Office furniture. Confident chairs.
- **UNE-EN 1022:05.** Office furniture. Confident chairs.
- **UNE-EN 1728:00.** Domestic furniture - Seating - Test methods for the determination of strength and durability.