



■ **DESCRIPTION**

Polypropylene (P.P) back with 15% fiberglass. Wide range of colours. Optional Polypropylene (P.P) Arms reinforced with fibre glass.

Anti-skid surface Seat:

-shell, moulded Polypropylene (P.P)

-shell is manufactured with SEBS double layer padded injection on the rigid Polypropylene (P.P) shell with mineral particles

- Upholstered over foam (40-45kg/m³), Fabric T or Fabric N .

Frame manufactured with carbon cold-rolled steel 28x20x1,5mm thickness. Silver epoxy coat, 90 micron and anti-bacterial treatment. Stacking caps included.



■ **BACK AND SEAT**

(SEE FINISHES AND FABRIC CARD LAST PAGE)


■ **COMPLEMENTS**



Optional Hook on basket Ø 5 mm thickness with supports Ø 7 mm thickness. **Aluminum finish**



Optional writing tablet, compact laminate 13 mm and MFC silver 16 mm thickness. It could be fixed to the right or left hand side




Polypropylene (P.P) linking devices 5 mm thickness

- ① Polypropylene (P.P) 5 mm thickness with fiberglass backrest. Ergonomic shaped back including transpiration strips
- ② **Optional** arms: Polypropylene (P.P) with fiberglass
- ③ Back reinforcement
- ④ Anti-skid surface seat
- ⑤ Stacking caps
- ⑥ Steel tube frame, silver finish
- ⑦ Polypropylene (P.P) glides and caps, matching seat and backrest

■ **SIZES**

Total height: 830 mm
Total width: 500 mm
Total depth: 530 mm

Seat height: 420 mm
Seat width: 470 mm
Seat depth: 440 mm

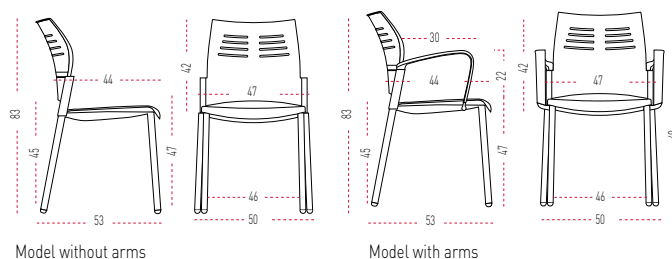

■ **DESCRIPTION**

Polypropylene (P.P) back with 15% fiberglass. Wide range of colours. Optional Polypropylene (P.P) Arms reinforced with fibre glass.

Anti-skid surface Seat:

-shell, moulded Polypropylene (P.P)

-shell is manufactured with SEBS double layer padded injection on the rigid Polypropylene (P.P) shell with mineral particles

-Upholstered over foam (40-45kg/m³), Fabric T or Fabric N.

Frame manufactured with carbon cold-rolled steel 28x20x1,5mm thickness . Silver epoxy coat, 90 micron and anti-bacterial treatment. Stacking caps included.



■ **BACK AND SEAT**

(SEE FINISHES AND FABRIC CARD LAST PAGE)

■ **CASTORS**




Ø 45 mm solft castors

- ① Polypropylene (P.P) 5 mm thickness with fiber glass backrest. Ergonomic shaped back including transpiration strips
- ② Back reinforcement
- ③ Anti-skid surface seat
- ④ Steel tube frame, silver finish
- ⑤ Carbon steel rod calibrated Ø 9 mm
- ⑥ Castors Ø 45 mm

■ **SIZES**

- Total height:** 830 mm
- Total width:** 500 mm
- Total depth:** 530 mm
- Seat height:** 420 mm
- Seat width:** 470 mm
- Seat depth:** 440 mm

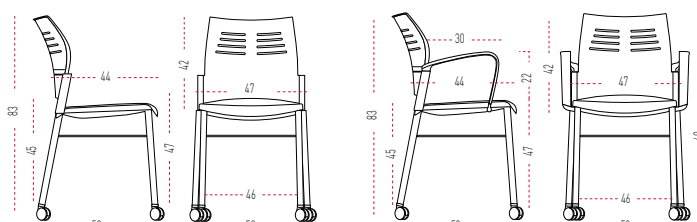

■ **DESCRIPTION**

Polypropylene (P.P) back with 15% fiberglass.
 Wide range of colours. Optional Polypropylene (P.P).
 Arms reinforced with fibre glass.
 Anti-skid surface Seat:
 -shell, moulded Polypropylene (P.P)
 -shell is manufactured with SEBS double layer padded injection on the rigid Polypropylene (P.P) shell with mineral particles.
 -Upholstered over foam (40-45kg/m³), Fabric T or Fabric N thickness. Silver epoxy coat, 90 micron and anti-bacterial treatment. Black or silver polyamide (PAG + 30% FV) start. Base Ø 65 cm with black or dark grey castors. Gas lift.

■ **BACK AND SEAT**

(SEE FINISHES AND FABRIC CARD LAST PAGE)

■ **BASES AND CASTORS**



Black Polyamide - Ø 65 cm
 Black Polyamide castor Ø 50 mm
 Black anti-skid castor Ø 50 mm



Dark grey Polyamide - Ø 65 cm
 Dark grey Polyamide castor Ø 50 mm
 Dark grey anti-skid castor Ø 50 mm


■ **SIZES**

Total height: from 850 to 955 mm
 Total width: 650 mm
 Total depth: 650 mm

 Seat height: 420 mm
 Seat width: 470 mm
 Seat depth: 440 mm



- ① Polypropylene (P.P) 5 mm thickness with fibre glass backrest. Ergonomic shaped back including transpiration strips
- ② Back reinforcement
- ③ **Optional** arms: Polypropylene (P.P) with fiberglass
- ④ Anti-skid surface seat
- ⑤ Gas lift
- ⑥ Base Ø 65 cm (PAG+30% FV)
- ⑦ Anti-skid castors Ø 50 mm

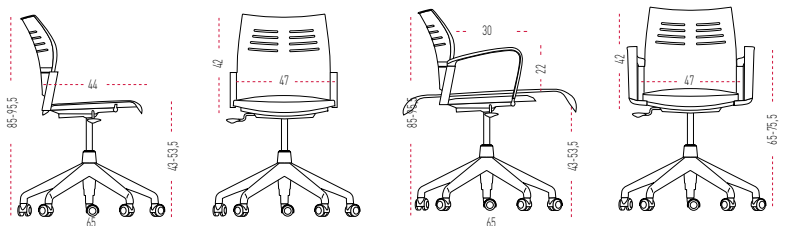

■ **DESCRIPTION**

Polypropylene (P.P) back with 15% fiberglass.
 Wide range of colours. Optional Polypropylene (P.P) Arms reinforced with fibre glass.
 Anti-skid surface Seat:
 -shell, moulded Polypropylene (P.P)
 -shell is manufactured with SEBS double layer padded injection on the rigid Polypropylene (P.P) shell with mineral particles
 -Upholstered over foam (40-45kg/m³), Fabric T or Fabric N.
 Chromed steel footrest. Curved tube Ø 18 x 1,5 mm thickness. Swivel 5 star base Ø 67,5 cm available in Silver aluminium or black polyamid with Polypropylene (P.P) black caps. Gas lift.

■ **BACK AND SEAT**

(SEE FINISHES AND FABRIC CARD LAST PAGE)

■ **BASE**



Swivel silver aluminum base - 67,5 cm
 Polypropylene (PP) black caps




Swivel black polyamide base - 67,5 cm
 Polypropylene (PP) black caps

■ **SIZES**

Total height: from 1050 mm to 1230 mm
Total width: 675 mm
Total depth: 206 mm
Seat height: 420 mm
Seat width: 470 mm
Seat depth: 440 mm



- ① Polypropylene (P.P) 5 mm thickness with fiberglass backrest. Ergonomic shaped back including transpiration strips
- ② Back reinforcement
- ③ **Optional** arms: Polypropylene (P.P) with fiberglass
- ④ Anti-skid surface seat
- ⑤ Gas lift
- ⑥ Chromed steel footrest. Curved tube Ø 18 x 1,5 mm thickness
- ⑦ 5 Star base, Ø 67,5 cm finished in **Silver aluminium or black polyamide**
- ⑧ Polypropylene (P.P) black caps

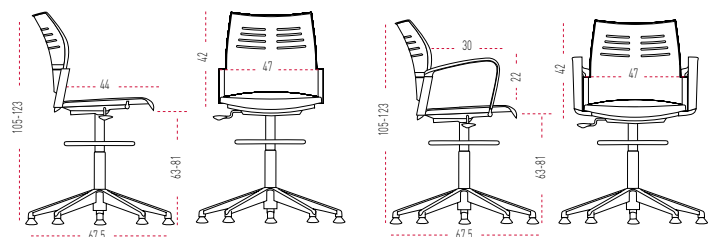



■ **DESCRIPTION**

- ① Polypropylene (P.P) back with 15% fibre glass. Wide range of colours. Optional Polypropylene (P.P). Arms reinforced with fiberglass.
- ② Back reinforcement.
- ③ Anti-skid surface Seat:
- shell, moulded Polypropylene (P.P).
- ④ Steel legs, cone shape 35 x 40 x 1,5 mm thickness. Silver epoxy coat, 90 micron and anti-bacterial treatment.


Moulded steel beam. Silver finish 80 x 40 x 2 mm thickness.

- ⑥ Moulded ABS leveler. Polyethylene (PE) caps Ø 40 mm.
- ⑦ Optional MFC table in different finishes: elm, walnut. 4 and 5 seats SPACIO beams include a central support leg.

■ **SIZES**

Total height: 830 mm
 Total width: from 1150 mm to 2380 mm
 Total depth: 590 mm

 Seat height: 420 mm
 Seat width: 470 mm
 Seat depth: 440 mm

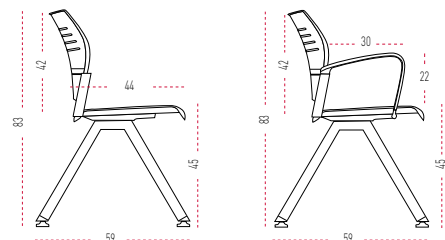



MATERIALS

Maximum use of materials to eliminate and minimize scraps. Use of recyclable and recycled materials in those components that do not affect the functionality and durability.

8,53%
RECYCLED
MATERIALS



PRODUCTION

Maximum optimization of energy use. Minimal environmental impact. Last generation technological systems. Zero discharge of wastewater. No VOC coatings. Processes free of heavy metals, phosphates, OC and COD.

100%
RECYCLABLE
ALUMINIUM, STEEL
& WOOD



TRANSPORT

Detachable systems. Volumes that facilitate the optimization of space. Maximum reduction of energy consumption by transport.

100%
RECYCLABLE
PACKAGE AND THINNER
FREE



USE

Quality and warranty. Long lasting. Replacements available.

EASY
TO CLEAN
AND MAINTAIN



DISPOSAL

Waste reduction. Supplier-manufacturer packaging reuse system. Components are easy to be separated. Inks in packaging are water-based, without solvents.

98,99%
RECYCLABLE
MATERIALS

■ **CERTIFICATES AND REFERENCES**

The different programmes get points in different environmental categories to get the LEED certificate (sustainability, material and resources, water, energy and atmosphere, inner environment quality, innovation and design).



The mark of responsible forestry



PEFC Certificate



EN ISO 14006:2011
ECODESIGN Certificate



UNE-EN ISO 9001:2008
ISO 9001 Certificate



UNE-EN ISO 14001:2004
ISO 14001 Certificate



E1 Certificate
by EN 13986



PARQUE TECNOLÓGICO ACTIU
proyecto certificado LEED® GOLD
por el U.S. Green Building Council en 2011
Leadership in Energy & Environmental Design

■ **STANDARDS**

SPACIO has passed tests done in our technical department as well as the tests done in **AIDIMA** the Technological Institute for furniture.

The tests correspond to:

Confident office chair. Standard applied

- **UNE-EN 13761:04.** Office furniture. Confident chairs.
- **UNE-EN 1022:05.** Office furniture. Confident chairs.
- **UNE-EN 1728:00.** Domestic furniture - Seating - Test methods for the determination of strength and durability.


Gas Lift. Standard applied

- **UNE-EN 1335-1:01.** Office Furniture. Office chair. Part 1: Dimensions.
- **UNE-EN 1335-3:09.** Office Furniture. Office chair. Part 3: Security essays.


Beam Seating. Standard applied

- **UNE-EN 16139:13.** Furniture. Resistance, long lasting, security. Requirements for non domestic use seating.

■ **4 LEGGED CHAIR WITH WRITING TABLET**



With weight more than 15 kg.
Without a seated user, the chair overturns.



With a seated user, maximum
resistance of writing tablet 40 kg.

FABRIC

■ **BACK & SEAT**



Moulded polypropylene (P.P)

POLYPROPYLENE




■ **BACK**



Upholstered over foam (40-45kg/m³),
Fabric T or Fabric N

GROUP T-C



GROUP N



■ **BACK**



SEBS double layer padded injection
on the rigid Polypropylene (P.P)
shell with mineral particles

POLYURETHANE

